

G 6-Dieci 700 bar

PREMIUM





Motor-pump coupling with a flexible joint

Accoppiamento motore pompa con giunto elastico

TW 700 bar

Triplex pump with S.S. head

Pompa triplex con testata in acciaio inox

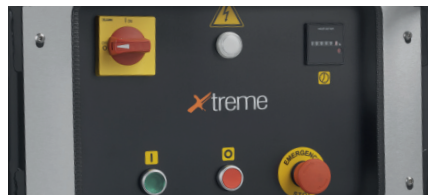

Low voltage (24V) control panel with star-delta system









Quadro di avviamento stella triangolo con comandi in bassa tensione (24V)




GENERAL FEATURES · CARATTERISTICHE GENERALI

- No water safety device at pump inlet
- Sturdy frame painted with anti-corrosive treatment
- Stainless-steel cover panel
- Handy lance and gun storage
- High filtering capacity cartridge self-cleaning suction filter
- Pneumatic wheels with steel hub and air chamber
- Electric motor (1400 rpm) 30 HP
- Comet TW 700 triplex pump
- Motor-pump coupling with flexible joint
- S.S. pressure gauge
- Automatic unloader valve with external by-pass and gradual pressure restoring
- Safety valve
- Overheating thermostatic valve
- Low voltage (24V) control panel with star-delta system
- Remote switch and motor cut-out with thermal relay
- Emergency stop button
- Hour counter
- Dispositivo di sicurezza mancanza acqua in ingresso pompa
- Robusto telaio verniciato con trattamenti anticorrosivi
- Carena in acciaio inox
- Pratico alloggiamento di pistola e lancia
- Filtro aspirazione autopulente a cartuccia ampiamente sovradimensionato, con alto potere filtrante
- Ruote schiumate con mozzo in acciaio ad effetto pneumatico
- Motore elettrico (1400 giri/min) 30 HP
- Pompa triplex Comet TW 700
- Accoppiamento motore pompa mediante giunto elastico
- Manometro in acciaio inox
- Valvola automatica di regolazione con by-pass esterno e ripristino graduale della pressione
- Valvola di sicurezza
- Valvola termostatica di protezione da sovratemperatura
- Quadro di avviamento stella triangolo con comandi in bassa tensione (24V)
- Teleruttore e protezione del motore con relè termico
- Pulsante di arresto di emergenza
- Contatore
- Uso altamente professionale

TECHNICAL FEATURES · CARATTERISTICHE TECNICHE

CODE CODICE	MODELS MODELLI	PUMP POMPA														
			Ph	V	Hz	bar	MPa	bar	MPa	l/h	HP	kW	kW	kg	(L x W x H) cm	
G 6-10 0025	G 6-Dieci 15/700	TW Premium 700	3	400	50	730	73	100±700	10±70	340±900	30,0	22,1	23,0	200	100 x 75 x 85	

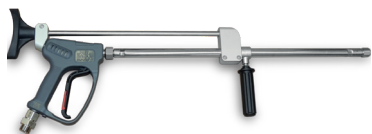STANDARD EQUIPMENT · DOTAZIONE STANDARD


GC 1100 waterblasting spray gun with lance
Pistola con lancia per waterblasting GC 1100



Threaded Flat Jet nozzle
Ugello filettato getto piatto



Hose whips
Calze di sicurezza



20 mt delivery hose kit with quick coupler M24x1,5 DKO
Kit tubo mandata 20 mt con attacchi rapidi M24x1,5 DKO



Self cleaning water filter
Filtro acqua autopulente



Hose check
Cappio